


RM 135

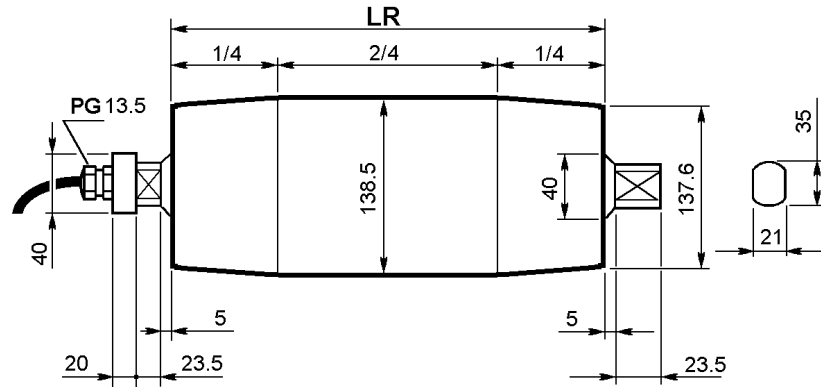

| kW HP | Poli Poles n. | V m/s | M Nm | F N | L min. mm | Peso/Weight [kg] | | | | | | | | | | | | | |
|---|---------------------|----------|---------|--------|-----------------|------------------|------|------|-----|------|-----|------|-----|------|------|------|-----|--|--|
| | | | | | | LR [mm] | | | | | | | | | | | | | |
| | | | | | | 350 | 400 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 | 950 | | |
| Motore trifase / Threephase motor | | | | | | | | | | | | | | | | | | | |
| 0.37 0.50 | 4 | 0.20 | 116 | 1720 | 350 | 15 | 16 | 16.5 | 17 | 17.5 | 18 | 18.5 | 19 | 19.5 | 20 | 20.5 | 21 | | |
| | | 0.28 | 82.9 | 1228 | 350 | | | | | | | | | | | | | | |
| | | 0.33 | 72.6 | 1075 | 350 | | | | | | | | | | | | | | |
| | | 0.40 | 58 | 860 | 350 | | | | | | | | | | | | | | |
| | | 0.50 | 46.4 | 688 | 350 | | | | | | | | | | | | | | |
| | | 0.63 | 36.9 | 546 | 350 | | | | | | | | | | | | | | |
| 0.25 0.33 | 6 | 0.13 | 120.7 | 1788 | 400 | 18 | 18.5 | 19 | 21 | 23 | 24 | 25 | 26 | 27 | 28.5 | 30 | | | |
| | | 0.15 | 104.6 | 1549 | 400 | | | | | | | | | | | | | | |
| | | 0.21 | 74.7 | 1107 | 400 | | | | | | | | | | | | | | |
| | | 0.25 | 62.7 | 930 | 400 | | | | | | | | | | | | | | |
| | | 0.32 | 49 | 728 | 400 | | | | | | | | | | | | | | |
| 0.55 0.75 | 2 | 0.40 | 86.3 | 1278 | 400 | 18 | 18.5 | 19 | 21 | 23 | 24 | 25 | 26 | 27 | 28.5 | 30 | | | |
| | | 0.50 | 69 | 1023 | 400 | | | | | | | | | | | | | | |
| | | 0.63 | 51.8 | 812 | 400 | | | | | | | | | | | | | | |
| | | 0.8 | 43.1 | 639 | 400 | | | | | | | | | | | | | | |
| | | 1.0 | 34.5 | 511 | 400 | | | | | | | | | | | | | | |
| | | 1.25 | 27.6 | 409 | 400 | | | | | | | | | | | | | | |
| Motore monofase / Single-phase motor | | | | | | | | | | | | | | | | | | | |
| 0.37 0.50 | 4 | 0.32 | 72.6 | 1075 | 400 | 18 | 18.5 | 19 | 21 | 23 | 24 | 25 | 26 | 27 | 28.5 | 30 | | | |
| | | 0.40 | 58 | 860 | 400 | | | | | | | | | | | | | | |
| | | 0.50 | 46.4 | 688 | 400 | | | | | | | | | | | | | | |
| | | 0.63 | 36.9 | 546 | 400 | | | | | | | | | | | | | | |

V = Velocità del nastro m/s
M = Coppia all'asse del motorullo Nm
F = Trazione del nastro N
L = Larghezza minima del mantello mm

V = Belt speed m/s
M = Drummotor axis torque Nm
F = Belt pull N
L = Min. face width mm